

## FEATURES :

- 8W DIL Package
- 4:1 Wide Input Range
- 100% Burned In
- High Efficiency Up To 87%
- Customized Solutions Available
- Remote Control:On/Off
- UL94V-0 Package Material
- Operating Temperature From -40°C To +87°C
- 3 Years Warranty

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

| Part Number    | Input Voltage | Input Current    |                    | Output Voltage | Output Current | Efficiency |
|----------------|---------------|------------------|--------------------|----------------|----------------|------------|
|                | Vdc           | No Load (mA TYP) | Full Load (mA TYP) | Vdc            | Full Load (mA) | %TYP       |
| 68DW8-24S03RNL | 9-36          | 30               | 392                | 3.3            | 2424           | 85         |
| 68DW8-24S05RNL | 9-36          | 30               | 388                | 5              | 1600           | 86         |
| 68DW8-24S12RNL | 9-36          | 30               | 383                | 12             | 666            | 87         |
| 68DW8-24S15RNL | 9-36          | 30               | 383                | 15             | 533            | 87         |
| 68DW8-24D05RNL | 9-36          | 30               | 392                | ±5             | ±800           | 85         |
| 68DW8-24D12RNL | 9-36          | 30               | 383                | ±12            | ±333           | 87         |
| 68DW8-24D15RNL | 9-36          | 30               | 383                | ±15            | ±267           | 87         |
| 68DW8-48S03RNL | 18-75         | 20               | 196                | 3.3            | 2424           | 85         |
| 68DW8-48S05RNL | 18-75         | 20               | 194                | 5              | 1600           | 86         |
| 68DW8-48S12RNL | 18-75         | 20               | 192                | 12             | 666            | 87         |
| 68DW8-48S15RNL | 18-75         | 20               | 192                | 15             | 533            | 87         |
| 68DW8-48D05RNL | 18-75         | 20               | 196                | ±5             | ±800           | 85         |
| 68DW8-48D12RNL | 18-75         | 20               | 192                | ±12            | ±333           | 87         |

## Input Specifications

| Parameters    | Conditions | Min | Typ        | Max | Units |
|---------------|------------|-----|------------|-----|-------|
| Voltage Types | Vo, Io Nom |     |            | 4:1 |       |
| Filter        |            |     | PI Network |     |       |

YUAN DEAN SCIENTIFIC



DC-DC Converter


68DW8 SERIES

8Watt 1.6KV Isolated


4 : 1 Input Voltage Range

Single &amp; Dual Output

1.25" x 0.8"



## Temperature Derating Graph

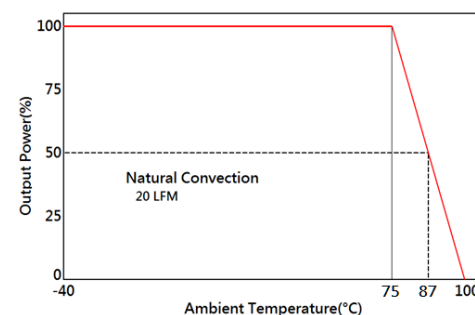

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288  
E-MAIL : ydsweb@yds.com.tw

Rev:0 2018/10/31

## Output Specifications

| Parameters                      | Conditions                           | Min | Typ | Max        | Units |
|---------------------------------|--------------------------------------|-----|-----|------------|-------|
| Voltage Tolerance               | Full load@Vin(nom.)                  |     |     | ±2         | %     |
| Short Circuit Protection        | Hiccup,<br>automatic Recovery        |     |     |            |       |
| Line Regulation                 |                                      |     |     | ±0.5       | %     |
| Load Regulation                 | Single<br>Dual(Balance Load)         |     |     | ±0.5<br>±1 | %     |
| Cross Regulation                | Dual<br>(25% To 100% Load)           |     |     | ±5         | %     |
| Ripple & Noise                  | Output:3-15V TYPES<br>BW=DC To 20MHz |     |     | 100        | mVp-p |
|                                 | Output > 15V TYPES<br>BW=DC To 20MHz |     |     | 1% of Vout | mVp-p |
| Transient response setting time | 25% load step change                 |     | 350 |            | us    |

## General Specifications

| Parameters            | Conditions                                   | Min     | Typ            | Max | Units |
|-----------------------|----------------------------------------------|---------|----------------|-----|-------|
| Isolation Voltage     |                                              |         | 1600           |     | Vdc   |
| Isolation Resistance  | 500Vdc                                       | 1000    |                |     | MΩ    |
| Switching Frequency   |                                              |         | 400            |     | KHz   |
| Operating Temperature | With derating                                | -40     |                | 87  | °C    |
| Storage Temperature   |                                              | -55     |                | 125 | °C    |
| Humidity              | Non Condensing                               |         |                | 95  | %     |
| Cooling               | Natural Convection (20LFM)                   |         |                |     |       |
| Case material         | Nickel coated copper with no-conductive base |         |                |     |       |
| MTBF                  | MIL-HDBK-217F<br>@25°C                       | 1500000 |                |     | Hours |
| Weight                |                                              |         | 16.2           |     | g     |
| Dimensions            |                                              |         | 31.6x20.1x10.0 |     | mm    |

## Part Number

68DW8 - 12 S 03 R NL  
A B C D E F

A : Series

B : Input Voltage



C : Single Output(S),Dual(D)

D : Output Voltage


E : Regulated(R)

F : RoHs Version

## Recommended Test Circuit

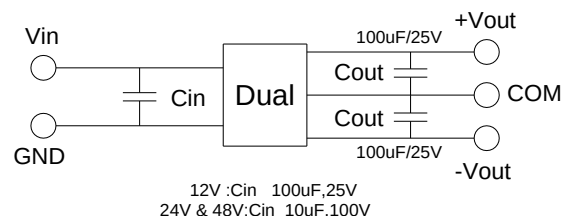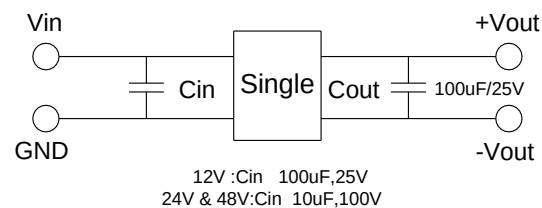

## Dimensions

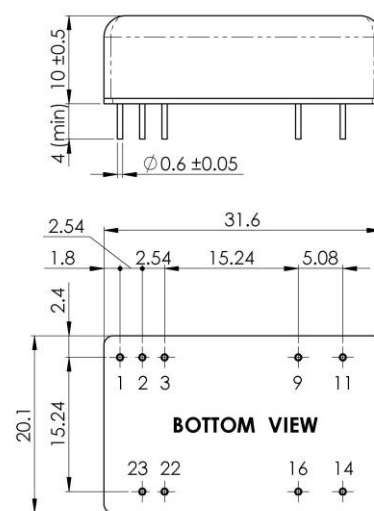

Unit : mm  
Tolerance : XX.X ± 0.5 , XX.XX ± 0.25

## PIN Assignment

| Pin    | 1             | 2,3  | 9      | 11    | 14    | 16     | 22,23 |
|--------|---------------|------|--------|-------|-------|--------|-------|
| Single | Remote ON/OFF | -Vin | NC     | NC    | +Vout | -Vout  | +Vin  |
| Dual   | Remote ON/OFF | -Vin | Common | -Vout | +Vout | Common | +Vin  |

[www.yds.com.tw](http://www.yds.com.tw)



TEL : 886-6-3842899 FAX : 886-6-3843288

E-MAIL : ydsweb@yds.com.tw

Rev:0 2018/10/31