

FEATURES :

- 4:1 Wide Input Voltage
- 3 Watt 24PIN DIL Package
- Efficiency To 80%
- 1500Vdc Isolation
- MTBF:> 1,500,000 hrs
- Operating Temperature:-40°C to +85°C

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency
	Vdc	Vdc	mA	%TYP
69D-24S05CN	9-36	5	600	75
69D-24S12CN	9-36	12	250	80
69D-24S15CN	9-36	15	200	75
69D-24D05CN	9-36	±5	±300	75
69D-24D12CN	9-36	±12	±125	75
69D-24D15CN	9-36	±15	±100	75
69D-48S05CN	18-72	5	600	75
69D-48S12CN	18-72	12	250	80
69D-48S15CN	18-72	15	200	75
69D-48D05CN	18-72	±5	±300	75
69D-48D12CN	18-72	±12	±125	75
69D-48D15CN	18-72	±15	±100	75

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Types				4:1	
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance				±2	%
Short Circuit Protection	Continuous				
Line Regulation				±0.5	%
Load Regulation	Single			±0.5	%
Load Regulation	Dual			±2.0	%
Ripple & Noise	BW=DC To 20MHz			100	mVp-p
Transient response setting time	50% load step change		350		us

YUAN DEAN SCIENTIFIC



DC-DC Converter

69D SERIES

3Watt 1.5KV Isolated


4 : 1 Input Voltage Range

Single & Dual Output

1.25" x 0.8"



Temperature Derating Graph

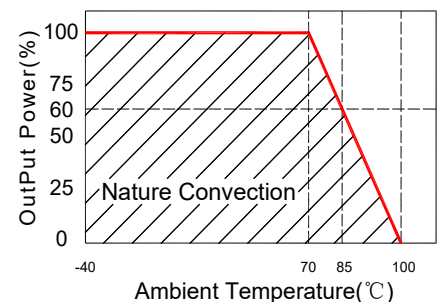

www.yds.com.tw




TEL : 886-6-3842899 FAX : 886-6-3843288
E-MAIL : ydsweb@yds.com.tw

Rev:2 2018/09/27

General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency			200		KHz
Operating Temperature		-40		85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	Nickel Coated Copper with Non-Conductive Base				
Weight			16.2		g
Dimensions		31.60x20.10x11.0			mm

Markings and Dimensions

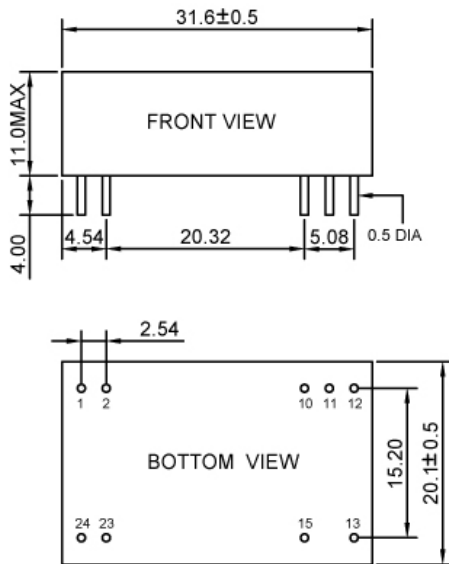


UNIT : mm Unless otherwise specified, all tolerances are ±0.25

PIN Connection



Pin	1.2	10.11	12	13	15	23.24
Single	+Vin	No Pin	-Vout	+Vout	No Pin	-Vin
Dual	+Vin	Com	No Pin	-Vout	+Vout	-Vin

Part Number




- A : Series
- B : Input Voltage
- C : Single(S); Dual(D)
- D : Output Voltage
- E : Types
- F : Package

Recommended Test Circuit

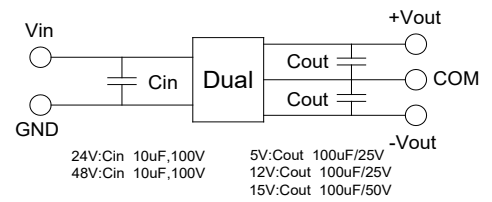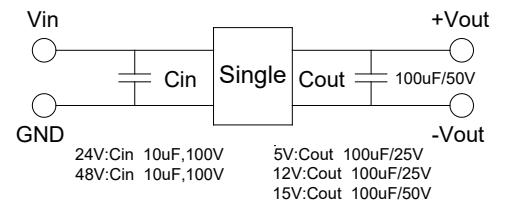

Packaging



Size(mm)		
A	B	C
18.71	23.00	52.2

